




TM-CB A S0



PARAMETERS

Basic version only monitoring of circuits	Only the current of the individual circuits is monitored. The system informs the user about the damage occurrence, giving the circuit number on which the failure occurred, e.g. ballast damage, fluorescent lamp burnout.
Maximum number of emergency fittings / circuit	20
Maximum number of circuits	10
Maximum number of emergency fittings in the system	200

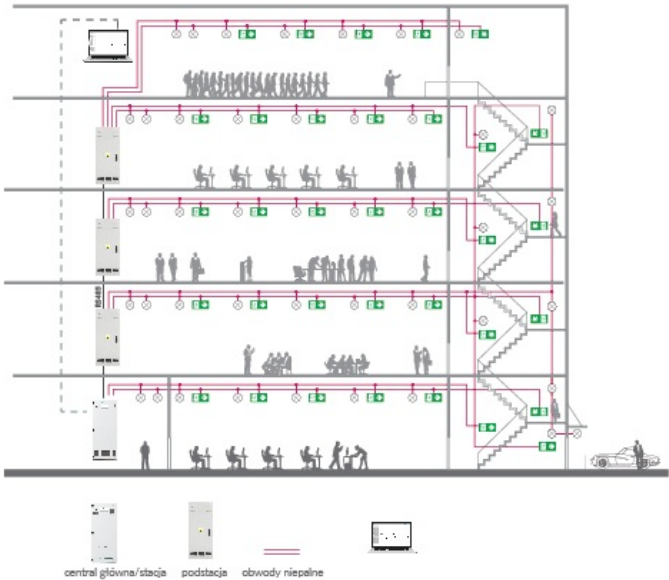

SYSTEM COMPONENTS

STATION



The control unit with touch panel. Station monitors the correct operation of emergency lighting devices. It determines their status through automatic function and autonomy tests and by checking the correctness of parameters. With this solution, information on all circuits and fittings installed in the building and connected to the system are readily and promptly available to the user at one location.

Material	RAL 9003 powder coated black steel
Insulation class	I
S0 : 1005 x 410 x 197 mm	< 900W / 7 A
Power supply	230 V AC / 50 Hz
Nominal Capacity	216 V DC
Batteries	Maintenance-free lead-acid batteries, service life up to 12 years.
Charging	CC/CV
Power	500 VA / circuit (max. 2,5 A)
Circuit operation	AC - mainmode / DC - battery mode
Mode	Flexible programming of individual circuits: mains, out-of-the-box, mixed.

CABLING



RS 485 port	connection between station/substation with I/O module
RS 485 port	connection between station with substation
LAN	communication with visualization ELVIS / BMS
cross-section 2,5 mm2	AC main supply
Cross-section 3 x 1,5 - 2,5 mm2, fireproof, maximum circuit length 200 m	AC/DC for luminaires

I/O MODULE



Device enabling control of emergency lighting groups, dedicated to DATA 2 and TM-CB emergency lighting systems. IN input and OUT output models are available. The DATA 2 and TM-CB system allows the connection of up to 16 I/O modules. The address of each module is set on DiP-switches on their housing. IN SW, IN 24, IN 230 version is used to control the night lighting, fire-emergency lighting groups, fire scenarios and has 8 inputs. The output module (OUT) is used to inform about the system status. It has 8 potential-free outputs.

IN SW	potential-free input
IN 24	24 V voltage detection
IN 230	230 V voltage detection
OUT	potential-free output 400 V AC / 250 V DC, max. 6 A



CIRCUIT CONTROLLER



Device that controls the operation of the output circuits. Depending on the operation mode, it switches on the appropriate voltage type, controls monitor fittings, conducts current measurements, switches luminaires to modified mode. One circuit controller supports two output circuits.

CHARGER



The charger continuously monitors charging current, battery voltage and temperature. It is a Plug&Play type device. The device charges by selecting charging voltages depending on the cell temperature. The correct operation of the charger, as well as errors are indicated by means of diodes.

