


TM.PRIMO A M4 180 NM AT



Catalog number	TM-A0.M4.AT04B
Application	anti-panic lighting
Duration time	3 h
Operating mode	NM
Version	AT - auto-test / self-test
Colour	RAL9005
Luminous flux	1224 lm
Maximum light power (the luminaire can power the light source with a different power)	9.6 W
Active power	12.7 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	no
Temperature range	5-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK03
Battery	2xLiFePO4/C 6.4V 4.5Ah
finish	- mirror stainless steel - black steel powder coated: RAL 9003 white RAL 9005 black

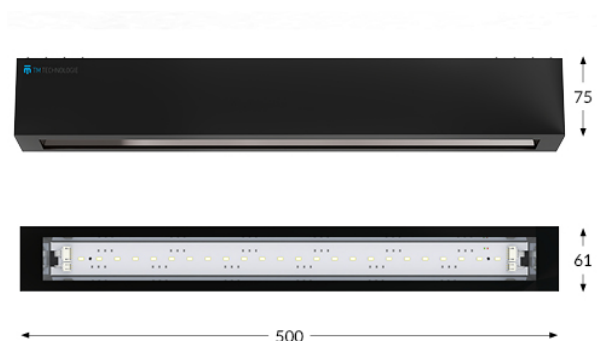