


TM.PRIMO A M4 CBA



Catalog number	TM-A0.M4.CBA1M
Application	anti-panic lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	M – Mirror
Luminous flux	1340 lm
Maximum light power (the luminaire can power the light source with a different power)	7.5 W
Active power	12.4 W
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	-10-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK03
finish	- mirror stainless steel - black steel powder coated: RAL 9003 white RAL 9005 black

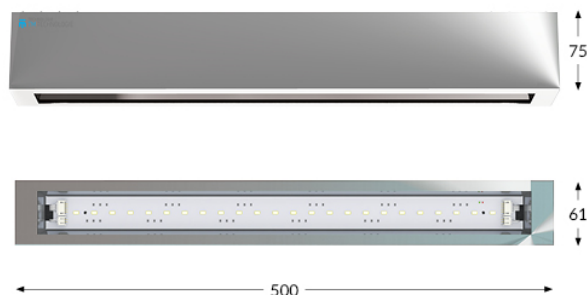