


# TM.ONTEC APN 31P CBA



|                                                                                       |                                                          |
|---------------------------------------------------------------------------------------|----------------------------------------------------------|
| Catalog number                                                                        | TM-AN.31P.CBA1W                                          |
| Duration time                                                                         | -                                                        |
| Operating mode                                                                        | -                                                        |
| Version                                                                               | for central battery                                      |
| Colour                                                                                | RAL9003                                                  |
| Visibility                                                                            | 32 m                                                     |
| Luminance                                                                             | >200 cd/m <sup>2</sup>                                   |
| Maximum light power (the luminaire can power the light source with a different power) | 2.5 W                                                    |
| Active power                                                                          | 4.7 W                                                    |
| Power supply                                                                          | 210+250 V AC                                             |
| Power supply CB                                                                       | 186+254 V DC                                             |
| Dimming mode                                                                          | yes                                                      |
| Temperature range                                                                     | -10-40 °C                                                |
| Material                                                                              | PC                                                       |
| Insulation class                                                                      | 2                                                        |
| IP                                                                                    | IP20                                                     |
| IK                                                                                    | IK06                                                     |
| Warranty                                                                              | 24 months - ST<br>36 months - AT<br>60 months - DATA, CB |
| View fitting                                                                          | one-sided or double-sided                                |
| Insulation                                                                            | II                                                       |

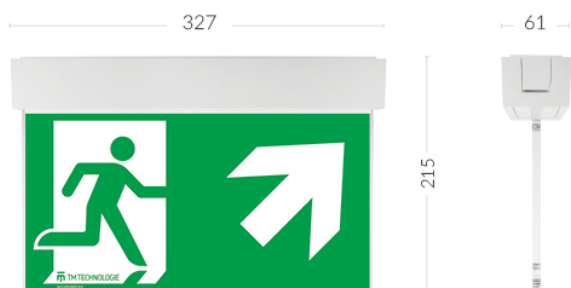