


ITECH S2

105 M DALI



Catalog number	TM-IT.S2DAM160W
Application	anti-panic lighting
Duration time	1 h
Operating mode	M
Version	DALI
Colour	RAL9003
Luminous flux	461 lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	yes
Temperature range	10-40 °C
Material	PC
Insulation class	2
IP	IP65
IK	IK06
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Type - DALI	A - maintained, controllable, dimmable
Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



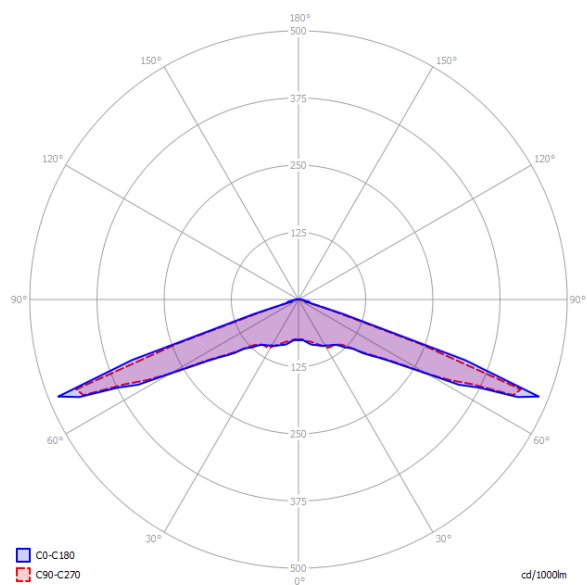

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	6,6	14,0
3,0	7,5	16,3
4,0	7,7	20,5
5,0	5,5	19,8
6,0	4,8	19,5
7,0	4,2	19,2
8,0	4,0	19,0
9,0	3,9	18,8
10,0	3,8	18,6

