



# TM.ONTEC C C1 60 NM AT



|                                                                                       |                                                                                                                                                       |
|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Catalog number                                                                        | TM-OC.C1ATN600C                                                                                                                                       |
| Application                                                                           | escape route lighting                                                                                                                                 |
| Duration time                                                                         | 1 h                                                                                                                                                   |
| Operating mode                                                                        | NM                                                                                                                                                    |
| Version                                                                               | AT - auto-test / self-test                                                                                                                            |
| Colour                                                                                | RAL3020                                                                                                                                               |
| Luminous flux                                                                         | 297 lm                                                                                                                                                |
| Maximum light power (the luminaire can power the light source with a different power) | 3 W                                                                                                                                                   |
| Active power                                                                          | 1.2 W                                                                                                                                                 |
| Power supply                                                                          | 210+250 V AC 50+60 Hz                                                                                                                                 |
| Power supply CB                                                                       | 186+254 V DC                                                                                                                                          |
| Dimming mode                                                                          | no                                                                                                                                                    |
| Temperature range                                                                     | 10-35 °C                                                                                                                                              |
| Material                                                                              | PC                                                                                                                                                    |
| Insulation class                                                                      | 2                                                                                                                                                     |
| IP                                                                                    | IP20                                                                                                                                                  |
| IK                                                                                    | IK03                                                                                                                                                  |
| Battery                                                                               | LiFePO4/C 3.2V 1.5Ah                                                                                                                                  |
| Warranty                                                                              | 24 months - ST<br>36 months - AT<br>60 months - DATA, CB                                                                                              |
| Standards                                                                             | PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838 |

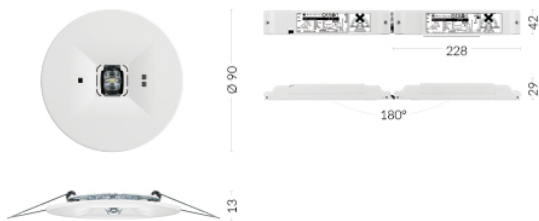

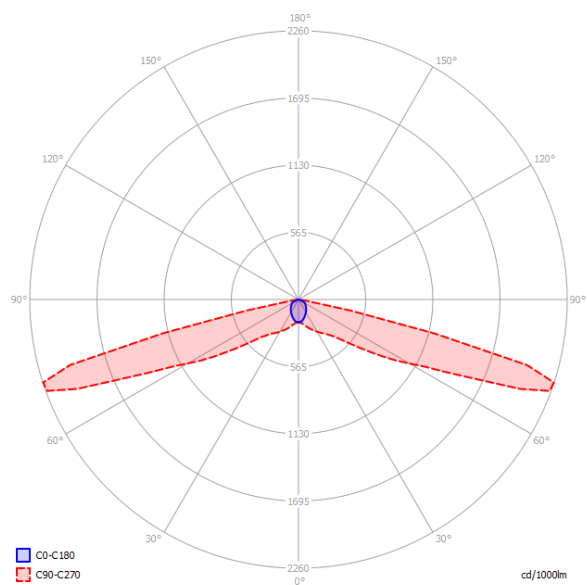

## PHOTOMETRY [m]

| Ceiling height | Distance wall - fitting | Distance fitting - fitting |
|----------------|-------------------------|----------------------------|
| 2,5            | 9,5 - 1h/CB   8,5 - 3h  | 21,0 - 1h/CB   19,0 - 3h   |
| 3,0            | 11,0 - 1h/CB   9,0 - 3h | 24,0 - 1h/CB   21,0 - 3h   |
| 4,0            | 13,0 - 1h/CB   7,5 - 3h | 29,0 - 1h/CB   23,0 - 3h   |
| 5,0            | 13,5 - 1h/CB   3,0 - 3h | 32,0 - 1h/CB   20,0 - 3h   |
| 6,0            | 10,5 - 1h/CB   3,0 - 3h | 34,0 - 1h/CB   14,0 - 3h   |
| 7,0            | 5,0 - 1h/CB             | 32,0 - 1h/CB               |
| 8,0            | 3,0 - 1h/CB             | 26,0 - 1h/CB               |
| 9,0            | 4,0 - 1h/CB             | 19,0 - 1h/CB               |
| 10,0           | /                       | /                          |

