


TM.ONTEC C C1 CBA



Catalog number	TM-OC.C1CBA000W
Application	escape route lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	RAL9003
Luminous flux	297 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	5.5 W
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	-10-40 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



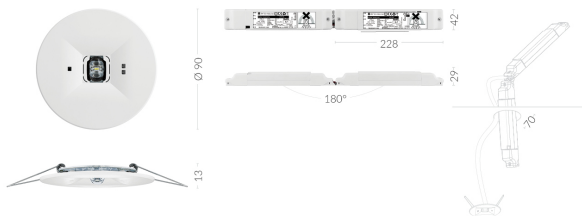

PHOTOMETRY [m]

Ceiling height

2,5

3,0

4,0

5,0

6,0

7,0

8,0

9,0

10,0

Distance wall - fitting

9,5 - 1h/CB | 8,5 - 3h

11,0 - 1h/CB | 9,0 - 3h

13,0 - 1h/CB | 7,5 - 3h

13,5 - 1h/CB | 3,0 - 3h

10,5 - 1h/CB | 3,0 - 3h

5,0 - 1h/CB

3,0 - 1h/CB

4,0 - 1h/CB

/

Distance fitting - fitting

21,0 - 1h/CB | 19,0 - 3h

24,0 - 1h/CB | 21,0 - 3h

29,0 - 1h/CB | 23,0 - 3h

32,0 - 1h/CB | 20,0 - 3h

34,0 - 1h/CB | 14,0 - 3h

32,0 - 1h/CB

26,0 - 1h/CB

19,0 - 1h/CB

/

