


TM.ONTEC C M2 302 M DALI



Catalog number	TM-OC.M2DAM300W
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	DALI
Colour	RAL9003
Luminous flux	288 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	7.0 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Type - DALI	A - maintained, controllable, dimmable
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



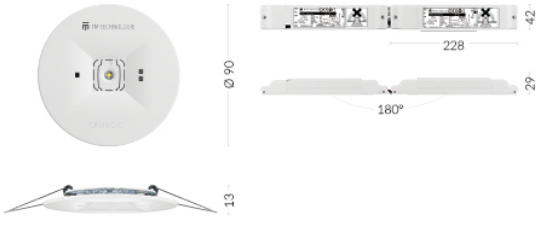

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	3,4	7,8
3,0	4,0	8,8
4,0	4,8	10,9
5,0	5,3	12,2
6,0	5,4	14,0
7,0	5,4	15,2
8,0	5,3	16,0
9,0	5,3	17,0
10,0	5,0	17,5

