



TM.ONTEC C M2H 303 M ST



Catalog number	TM-OC.MHSTM300W
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	ST – for button test
Colour	RAL9003
Luminous flux	393 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	8.6 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	LiFePO4/C 6.4V 3.0Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

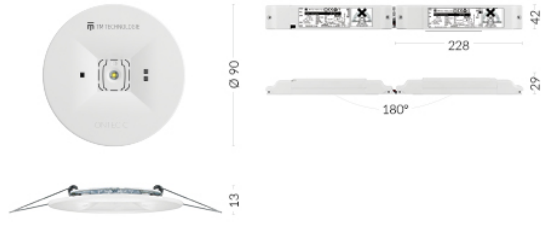

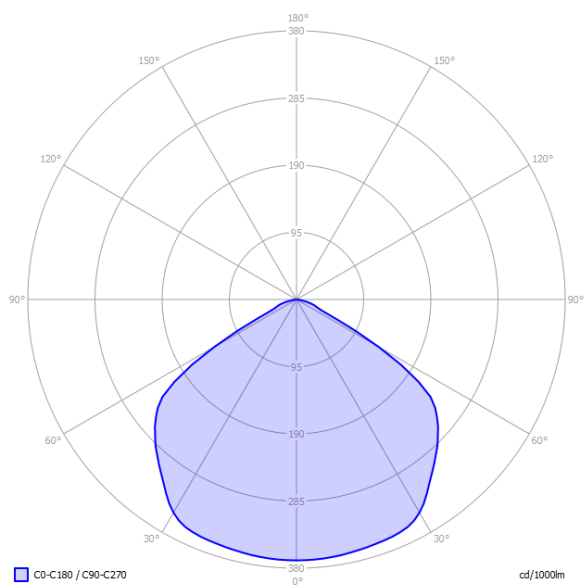

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	3,7	8,2
3,0	4,2	9,2
4,0	5,0	11,4
5,0	5,7	13,3
6,0	6,0	15,5
7,0	6,3	16,8
8,0	6,4	18,3
9,0	6,3	18,6
10,0	6,2	19,4

