



TM.ONTEC R C2

105 M DATA 2 RADIO



Catalog number	TM-OR.C2DRM100W
Application	escape route lighting
Duration time	1 h
Operating mode	M
Version	DD - DATA2
Colour	RAL9003
Luminous flux	541 lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6.7 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - AT 36 months - ST 60 months - DATA, CB
Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

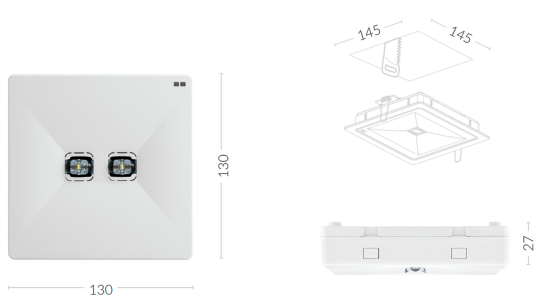

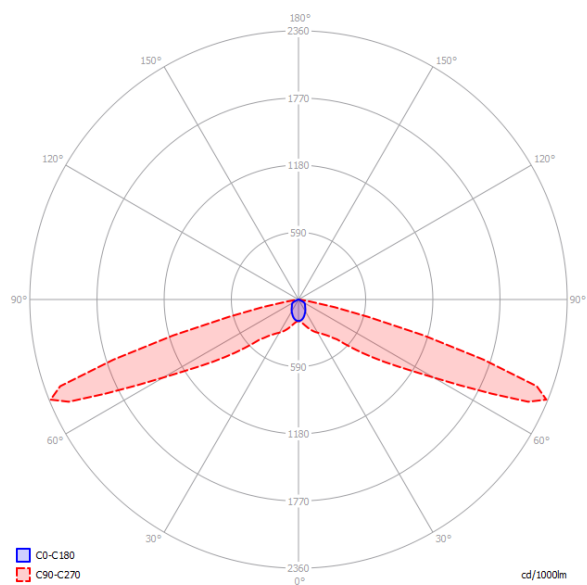

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	9,1	20,0
3,0	10,3	22,8
4,0	12,6	28,0
5,0	14,5	32,9
6,0	16,2	37,0
7,0	17,0	41,0
8,0	15,9	43,5
9,0	6,5	34,0
10,0	5,0	29,0

