



TM.ONTEC R M2 302 M AT



Catalog number	TM-OR.M2ATM300W
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	AT - auto-test / self-test
Colour	RAL9003
Luminous flux	288 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	7.2 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB

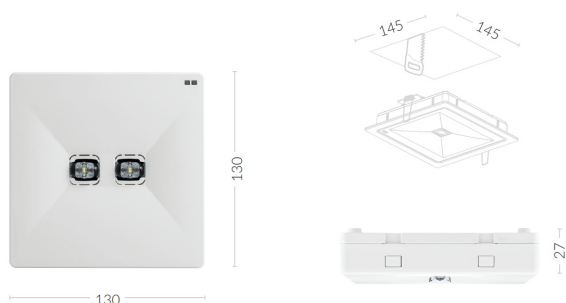

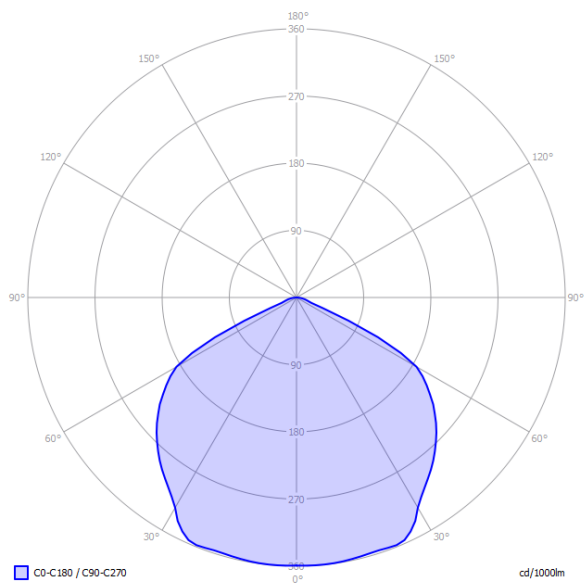

PHOTOMETRY [m]

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

3,8
4,3
4,9
5,1
5,2
5,3
5,2
5,0
4,9

Distance fitting - fitting

8,3
9,4
11,6
13,3
14,5
15,8
16,0
16,4
16,6

