



TM.ONTEC R M5 105 M DALI



Catalog number	TM-OR.M5DAM100W
Application	anti-panic lighting
Duration time	1 h
Operating mode	M
Version	DALI
Colour	RAL9003
Luminous flux	615 lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6.7 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	10-35 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK03
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Type - DALI	A - maintained, controllable, dimmable



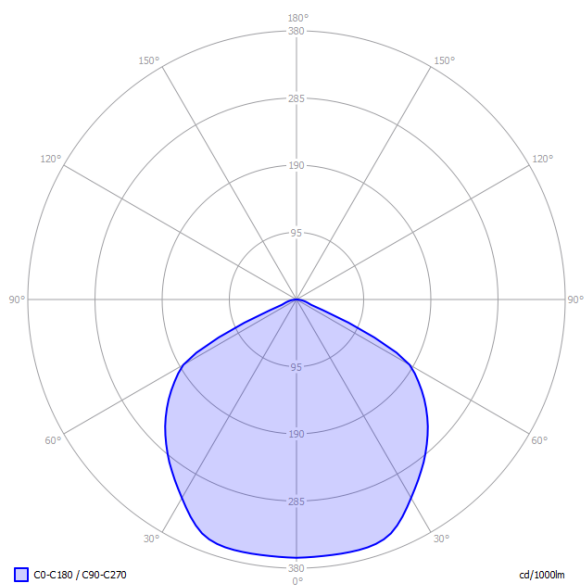

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	4,2	8,9
3,0	4,7	10,3
4,0	5,7	13,0
5,0	6,4	15,0
6,0	6,6	17,0
7,0	7,0	19,0
8,0	7,0	20,0
9,0	6,9	21,2
10,0	6,9	22,0

