


ONTEC S M2

302 M DATA 2



Catalog number	TM-OS.M2DDM360W
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	DD - DATA2
Colour	RAL9003
Luminous flux	241 lm
Maximum light power (the luminaire can power the light source with a different power)	4.7 W
Active power	6.5 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	10-40 °C
Material	PC
Insulation class	2
IP	IP65
IK	IK08
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838

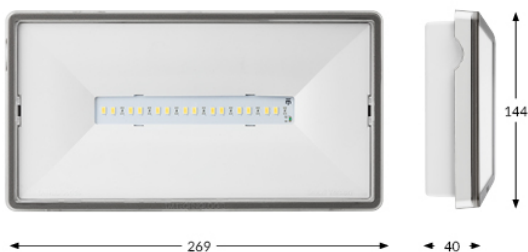



PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	3,6	9,5
3,0	3,8	10,4
4,0	4,2	11,8
5,0	4,6	13,0
6,0	4,7	13,9
7,0	4,6	14,8
8,0	4,6	15,3
9,0	4,3	15,8
10,0	4,0	16,0

Distance wall - fitting

Distance fitting - fitting

2,5

3,6

9,5

3,0

3,8

10,4

4,0

4,2

11,8

5,0

4.6

13,0

6.0

4.713.970461488046153904315910010160