


TM.PRIMO P C1 180 NM DATA 2



Catalog number	TM-P0.C1.BD04M
Application	escape route lighting
Duration time	3 h
Operating mode	NM
Version	DD - DATA2
Colour	M – Mirror
Luminous flux	444* lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	4.1 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	5-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK03
Battery	LiFePO4/C 6.4V 3.0Ah
finish	- mirror stainless steel - black steel powder coated: RAL 9003 white RAL 9005 black
Application	antipanic lighting
insulation class	I
Material	metal

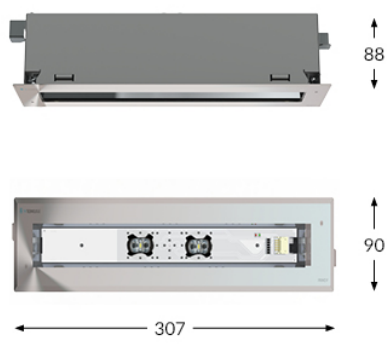