


# TM.PRIMO P M2 180 NM AT



|                                                                                       |                                                                                                |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| Catalog number                                                                        | TM-P0.M2.AT04B                                                                                 |
| Application                                                                           | anti-panic lighting                                                                            |
| Duration time                                                                         | 3 h                                                                                            |
| Operating mode                                                                        | NM                                                                                             |
| Version                                                                               | AT - auto-test / self-test                                                                     |
| Colour                                                                                | RAL9005                                                                                        |
| Luminous flux                                                                         | 651 lm                                                                                         |
| Maximum light power (the luminaire can power the light source with a different power) | 5.1 W                                                                                          |
| Active power                                                                          | 3.6 W                                                                                          |
| Power supply                                                                          | 210÷250 V AC 50÷60 Hz                                                                          |
| Power supply CB                                                                       | 186÷254 V DC                                                                                   |
| Dimming mode                                                                          | no                                                                                             |
| Temperature range                                                                     | 5-40 °C                                                                                        |
| Material                                                                              | metal                                                                                          |
| Insulation class                                                                      | 1                                                                                              |
| IP                                                                                    | IP20                                                                                           |
| IK                                                                                    | IK03                                                                                           |
| Battery                                                                               | LiFePO4/C 6.4V 4.5Ah                                                                           |
| finish                                                                                | mirror stainless steel<br>  black steel powder coated:<br>RAL 9003 - white<br>RAL 9005 - black |
| Application                                                                           | antipanic lighting                                                                             |
| insulation class                                                                      | I                                                                                              |
| Material                                                                              | metal                                                                                          |

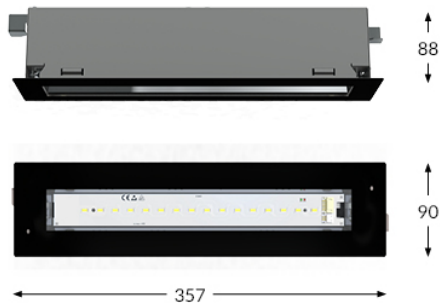