


TM.PRIMO P M2 CBA



Catalog number	TM-P0.M2.CBA1B
Application	anti-panic lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	RAL9005
Luminous flux	725 lm
Maximum light power (the luminaire can power the light source with a different power)	5.9 W
Active power	7.8 W
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	-10-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK03
finish	mirror stainless steel black steel powder coated: RAL 9003 - white RAL 9005 - black
Application	antipanic lighting
insulation class	I
Material	metal

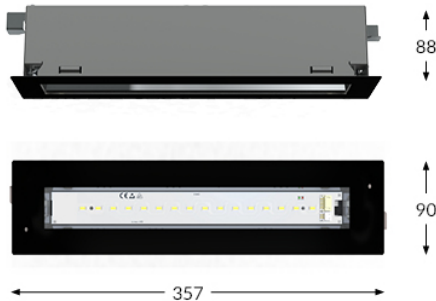