



TM.PRIMO D C1 60 NM DATA 2



Catalog number	TM-PD.C1BDN600M
Application	escape route lighting
Duration time	1 h
Operating mode	NM
Version	DD - DATA2
Colour	M – Mirror
Luminous flux	325 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	* W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	yes
Temperature range	10-35 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK03
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB

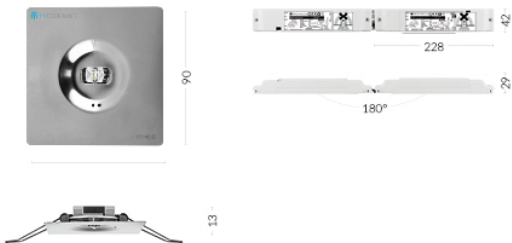

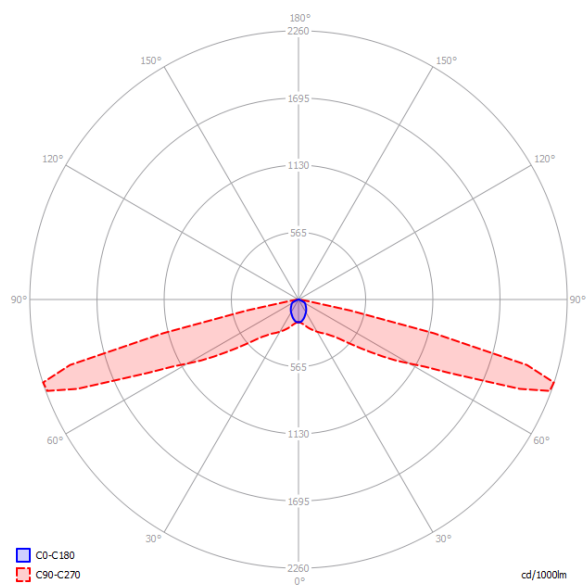

PHOTOMETRY [m]

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

9,2
10,2
11,7
10,9
5,6
3,6
2,7

Distance fitting - fitting

20,2
23,0
28,0
31,0
29,0
25,0
20,5

