



TM.PRIMO D C1 CBA



Catalog number	TM-PD.C1CBA000B
Application	escape route lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	RAL9005
Luminous flux	325 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	5.5 W
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	-10-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK03
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB

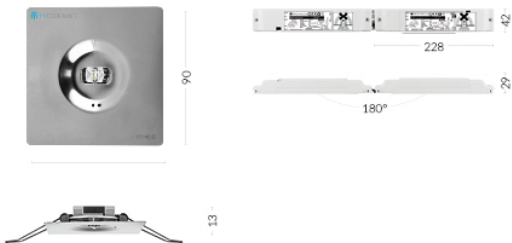

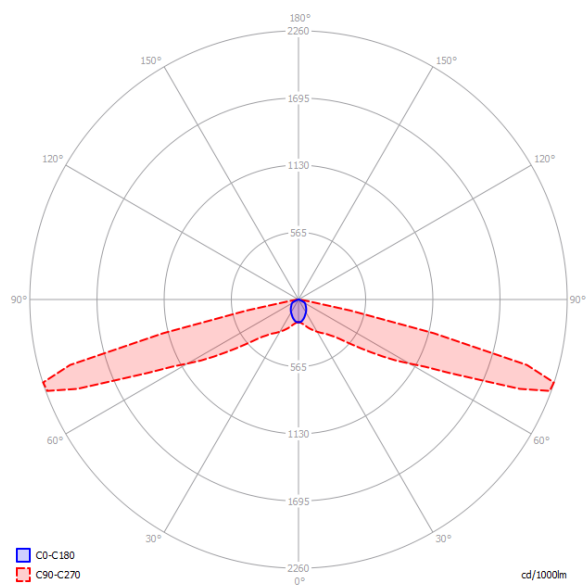

PHOTOMETRY [m]

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

9,2
10,2
11,7
10,9
5,6
3,6
2,7

Distance fitting - fitting

20,2
23,0
28,0
31,0
29,0
25,0
20,5

