


TM.PRIMO D C1 CBA



Catalog number	TM-PD.C1CBA000M
Application	escape route lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	M – Mirror
Luminous flux	325 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	5.5 W
Power supply	210÷250 V AC
Power supply CB	186÷254 V DC
Dimming mode	yes
Temperature range	-10-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK03
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB



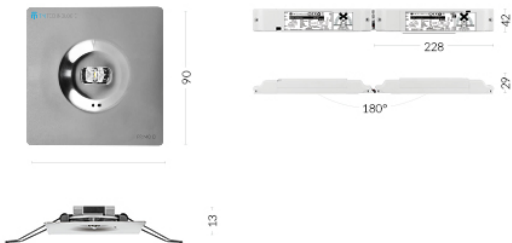

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	9,2	20,2
3,0	10,2	23,0
4,0	11,7	28,0
5,0	10,9	31,0
6,0	5,6	29,0
7,0	3,6	25,0
8,0	2,7	20,5
9,0		
10,0		

