


# TM.ONTEC S30 M5

## 180 NM DATA 2



|                                                                                       |                                                          |
|---------------------------------------------------------------------------------------|----------------------------------------------------------|
| Catalog number                                                                        | TM-S3.M5DDN360W                                          |
| Application                                                                           | anti-panic lighting                                      |
| Duration time                                                                         | 3 h                                                      |
| Operating mode                                                                        | NM                                                       |
| Version                                                                               | DD - DATA2                                               |
| Colour                                                                                | RAL9003                                                  |
| Luminous flux                                                                         | 1200 lm                                                  |
| Maximum light power (the luminaire can power the light source with a different power) | 5.8 W                                                    |
| Active power                                                                          | 4.01 W                                                   |
| Power supply                                                                          | 210+250 V AC 50+60 Hz                                    |
| Power supply CB                                                                       | 186+254 V DC                                             |
| Dimming mode                                                                          | no                                                       |
| Temperature range                                                                     | 5-40 °C                                                  |
| Material                                                                              | PC                                                       |
| Insulation class                                                                      | 2                                                        |
| IP                                                                                    | IP65/IK08                                                |
| IK                                                                                    | IK08                                                     |
| Battery                                                                               | 2xLiFePO4/C 6.4V 3.0Ah                                   |
| Warranty                                                                              | 24 months - ST<br>36 months - AT<br>60 months - DATA, CB |
| 60/180                                                                                | default 1h   M/NM<br>possibility change to 3h   M/NM     |

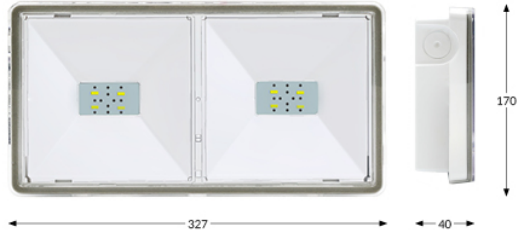