

TM TECHNOLOGIE
emergency & evacuation lighting



IP 20
IP 44

LED

3h



850 °C




210 ÷ 250 V AC
50 / 60 Hz
186 ÷ 254 V DC



RINO




! ±1 [mm]

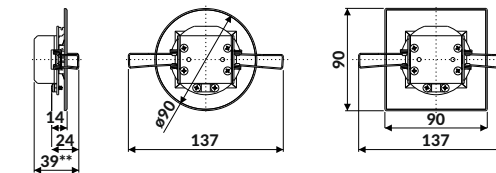


! ** M5 / C2 / W2 / F2 / S2

1

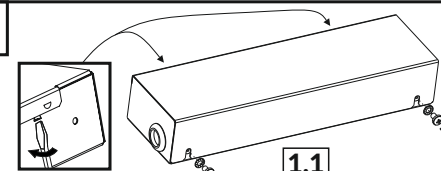


CBA / D2 / D2R / DA

1.2



1.3

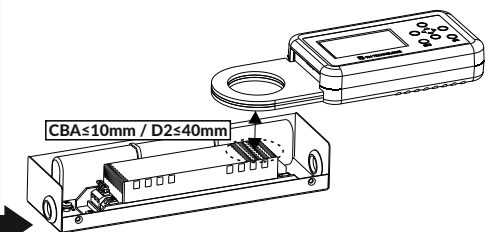


4

*ST / AT / DT / D2 / D2R / DA

4.1 → 1.1 → 1.2 → 3.2

4.2



LiFePO4/C 6.4V/4.5Ah

LiFePO4/C 6.4V/3.0Ah

LiFePO4/C 6.4V/1.5Ah

Ni-Cd 3.6V/1.5Ah

4.3



4.4




LiFePO4/C 6.4V/4.5Ah

LiFePO4/C 6.4V/3.0Ah


LiFePO4/C 6.4V/1.5Ah

Ni-Cd 3.6V/1.5Ah

4.5



4.6




4.7 → 1.8 → 1.9 → 1.10


RINO	M	NM	CB
t _c [°C]	105	80	105



RINO	M1
t _c [°C]	95



RINO	CBA
t _c [°C]	100



RINO	1LED / 2LED
t _c [°C]	70

